


2 Izmetalna igla Ejector Pin

DIN ISO 6751 CH HSS

DLC prevleka / DLC Coating

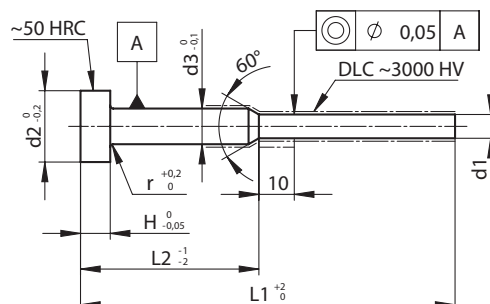

Reducirana izmetalna igla z DLC prevleko.

Ejector pins shouldered
and DLC coating.

Material:

DLC - ovoj z odličnimi drsnimi
lastnostmi.

Št. materiala:

1.3343(S 6-5-2)

Lastnosti materiala:

Odporen do 400°C / 750°F

Trdota:

Steblo: HRC DLC ~ 300 HV
na površini ~ 60

Glava: HRC 50 ± 5

Debelina sloja: ~ 1,5μ

Koeficient trenja: ~ 0,1 - 0,15

Material:

DLC coating with excellent sliding
properties.

Material Number:

1.3343(S 6-5-2)

Material properties:

Resistant up to 400° C / 750 ° F

Hardness:

Shank: HRC DLC ~ 300 HV
na površini ~ 60

Head: HRC 50 ± 5

Layer thickness: ~ 1,5μ

Coefficient of friction: ~ 0,10 - 0,15

Opomba | Note

Primerno za suho uporabo.

Suitable for dry run.



Ø d1 [mm]	Ø d3 h11	d2 x H -0,2 -0,05 [mm]	R+0,2 [mm]	L1+2 / 0													
				63	80	100	100	125	150	160	160	200	200	250	250	275	315
				L2 -1 / -2													
				25	35	35	50	50	50	62	75	75	90	100	112	125	160
0,50	2	4x2	0,2	•	•		•	•	•		•		•	•			
0,60				•	•	•	•	•	•	•	•		•	•			
0,70				•	•	•	•	•	•	•	•		•	•			
0,80				•	•	•	•	•	•	•	•	•	•	•	•	•	•
0,90				•	•	•	•	•	•	•	•	•	•	•			
1,00				•	•	•	•	•	•	•	•	•	•	•	•	•	•
1,10				•		•	•	•	•	•	•	•	•	•		•	•
1,20				•	•	•	•	•	•	•	•	•	•	•	•	•	•
1,30				•	•	•	•	•	•	•	•	•	•	•		•	
1,40					•	•	•	•	•	•	•	•	•	•		•	
1,50	3	6x3	0,3	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1,60					•		•	•	•	•	•	•	•	•		•	
1,70					•		•	•	•		•	•		•			
1,80							•	•	•	•	•	•	•	•		•	
2,00					•	•	•	•	•	•	•	•	•	•	•	•	•
2,10							•	•	•		•	•		•			
2,20					•			•	•		•	•		•			•
2,40								•	•			•		•			•
2,50							•	•	•	•	•	•	•	•		•	•