


## 2 Ploščata izmetalna igla Flat Ejector Pin

## DIN ISO 8693 FAH HSS

Kaljena, DLC / Hardened, DLC

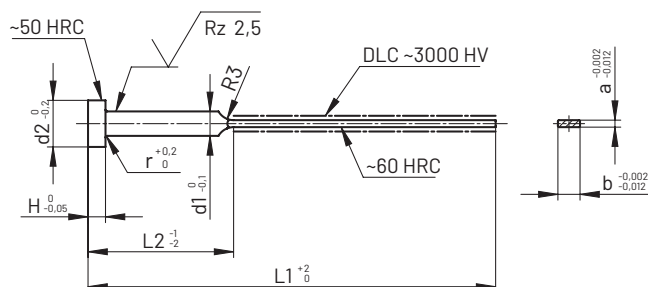

**Natančna ploščata podaljšana izmetalna igla, kaljena, 4 vogalnim radijem in DLC prevleko.**

Precision Flat Ejector with long blade, Hardened, DLC coating & 4 corner radii.

**Material:**  
HSS (Hitrorezna jekla)

**Št. materiala:**  
• 1.3343(S 6-5-2)

**Karakteristike:**  
Napustna obstojnost do 200°C / 392°F

**Trdota:**  
Steblo: DLC  $\sim 3000$  HV na površini  
 $\sim 60$   
Glava: HRC  $50 \pm 5$

**Debelina sloja:**  $\sim 1,5\mu$   
**Koeficient trenja:**  $\sim 0,1 - 0,15$

**Uporaba:**  
Primerno za suho uporabo.

**Material:**  
HSS (High speed steels)

**Material Number:**  
• 1.3343(S 6-5-2)

**Material properties:**  
Resistant up to 200°C / 392°F

**Hardness:**  
Shank: DLC  $\sim 3000$  HV on surface  
 $\sim 60$   
Head: HRC  $50 \pm 5$

**Layer thickness:**  $\sim 1,5\mu$   
**Coefficient of friction:**  $\sim 0,10 - 0,15$

**Use:**  
Suitable for dry run.



Ø b x a -0,015 [mm]	Ø d1  + prevleka /+ coating	d2 x H -0,2 -0,05 [mm]	R1 +0,2 [mm]	L1+2 / 0					
				125	160	160	200	250	315
				L2 -1 / -2					
				32	32	60	60	60	80
1,8x0,6	2	4x2	0,2	•	•	•			
2,8x0,6	3	6x3	0,3	•	•	•			
2,8x0,7				•		•			
2,8x0,8				•	•	•	•		
2,8x0,9					•	•			
3,8x0,6	4,2	8x3		•	•	•	•		
3,8x0,7				•	•	•			
3,8x0,8				•	•	•	•	•	•
3,8x0,9					•	•	•		
5,5x0,8	6	12x5	0,5	•	•	•	•	•	

